


INSTALLATION INSTRUCTIONS

Model: **MYSTIQUE PSX**
Fixture Family: **VOILA, WAND, DECK, ETC**
Document Description: Installation Instructions for
Mystique Pendant Series Luminaires

1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

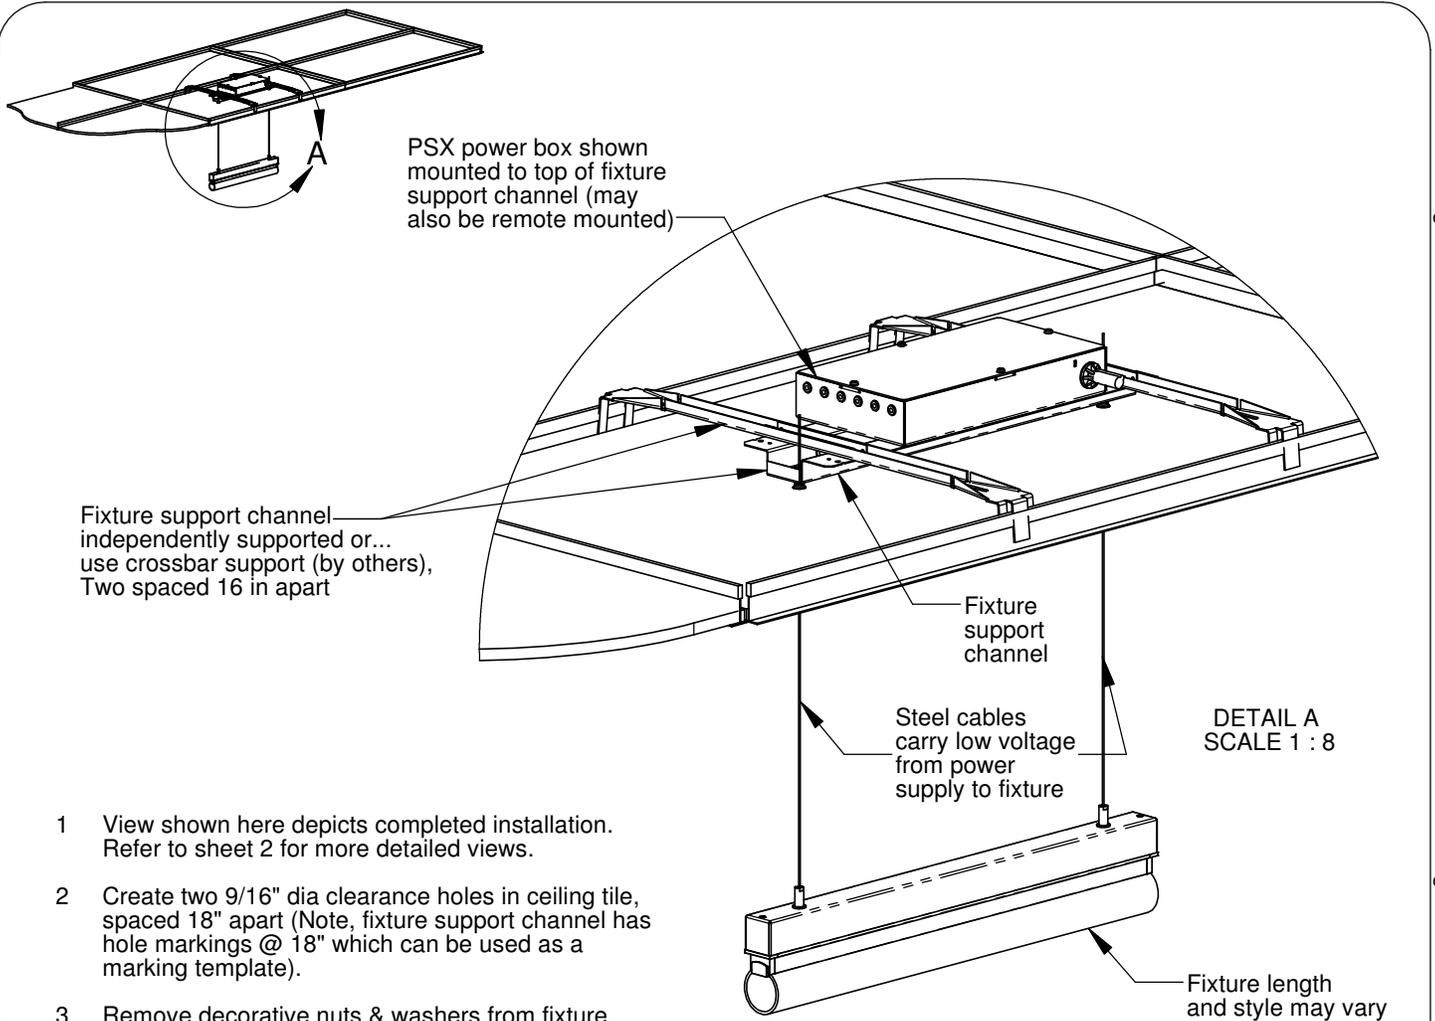

- 1 View shown here depicts completed installation. Refer to sheet 2 for more detailed views.
- 2 Create two 9/16" dia clearance holes in ceiling tile, spaced 18" apart (Note, fixture support channel has hole markings @ 18" which can be used as a marking template).
- 3 Remove decorative nuts & washers from fixture griplock assembly, place fixture support channel on top of ceiling tile so that the two griplocks go through the clearance holes.
- 4 Independently support both ends of the fixture support channel, adjusting mounting height so that the griplocks extend through the ceiling tile clearance holes approximately 3/16", then attach washers over the clearance holes and fasten with decorative nuts. Or...
- 5 ...alternately, support the fixture support channel using two Caddy crossbar support straps (by others) by removing small reinforcing brackets from each end, placing Caddy straps over studs protruding from top of the fixture support channel, re-attaching the small reinforcing brackets.
- 6 Install each fixture cable (1=pos +, 1=neg -) into each griplock, adjusting fixture height as necessary. Once height is adjusted, cut off excess cable @ top of griplock (these cables carry the low voltage power for the fixture and should not be in contact with any other metal surfaces).
- 7 Connect low voltage lead wires of fixture support channel assembly to PSX output (refer to additional instructions for the PSX box).


Refer to sheet 3 for drywall ceiling installation (JBC option)

- When using electrical equipment, basic safety precautions should always be followed, including the following:
- Read all instructions carefully before installing and save for future use.
 - Make sure all connections are in accordance with the National Electrical Code and local regulations.
 - To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

INSTALLATION INSTRUCTIONS

Model: **MYSTIQUE PSX**
Fixture Family: **VOILA, WAND, DECK, ETC**
Document Description: Installation Instructions for
Mystique Pendant Series Luminaires

1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

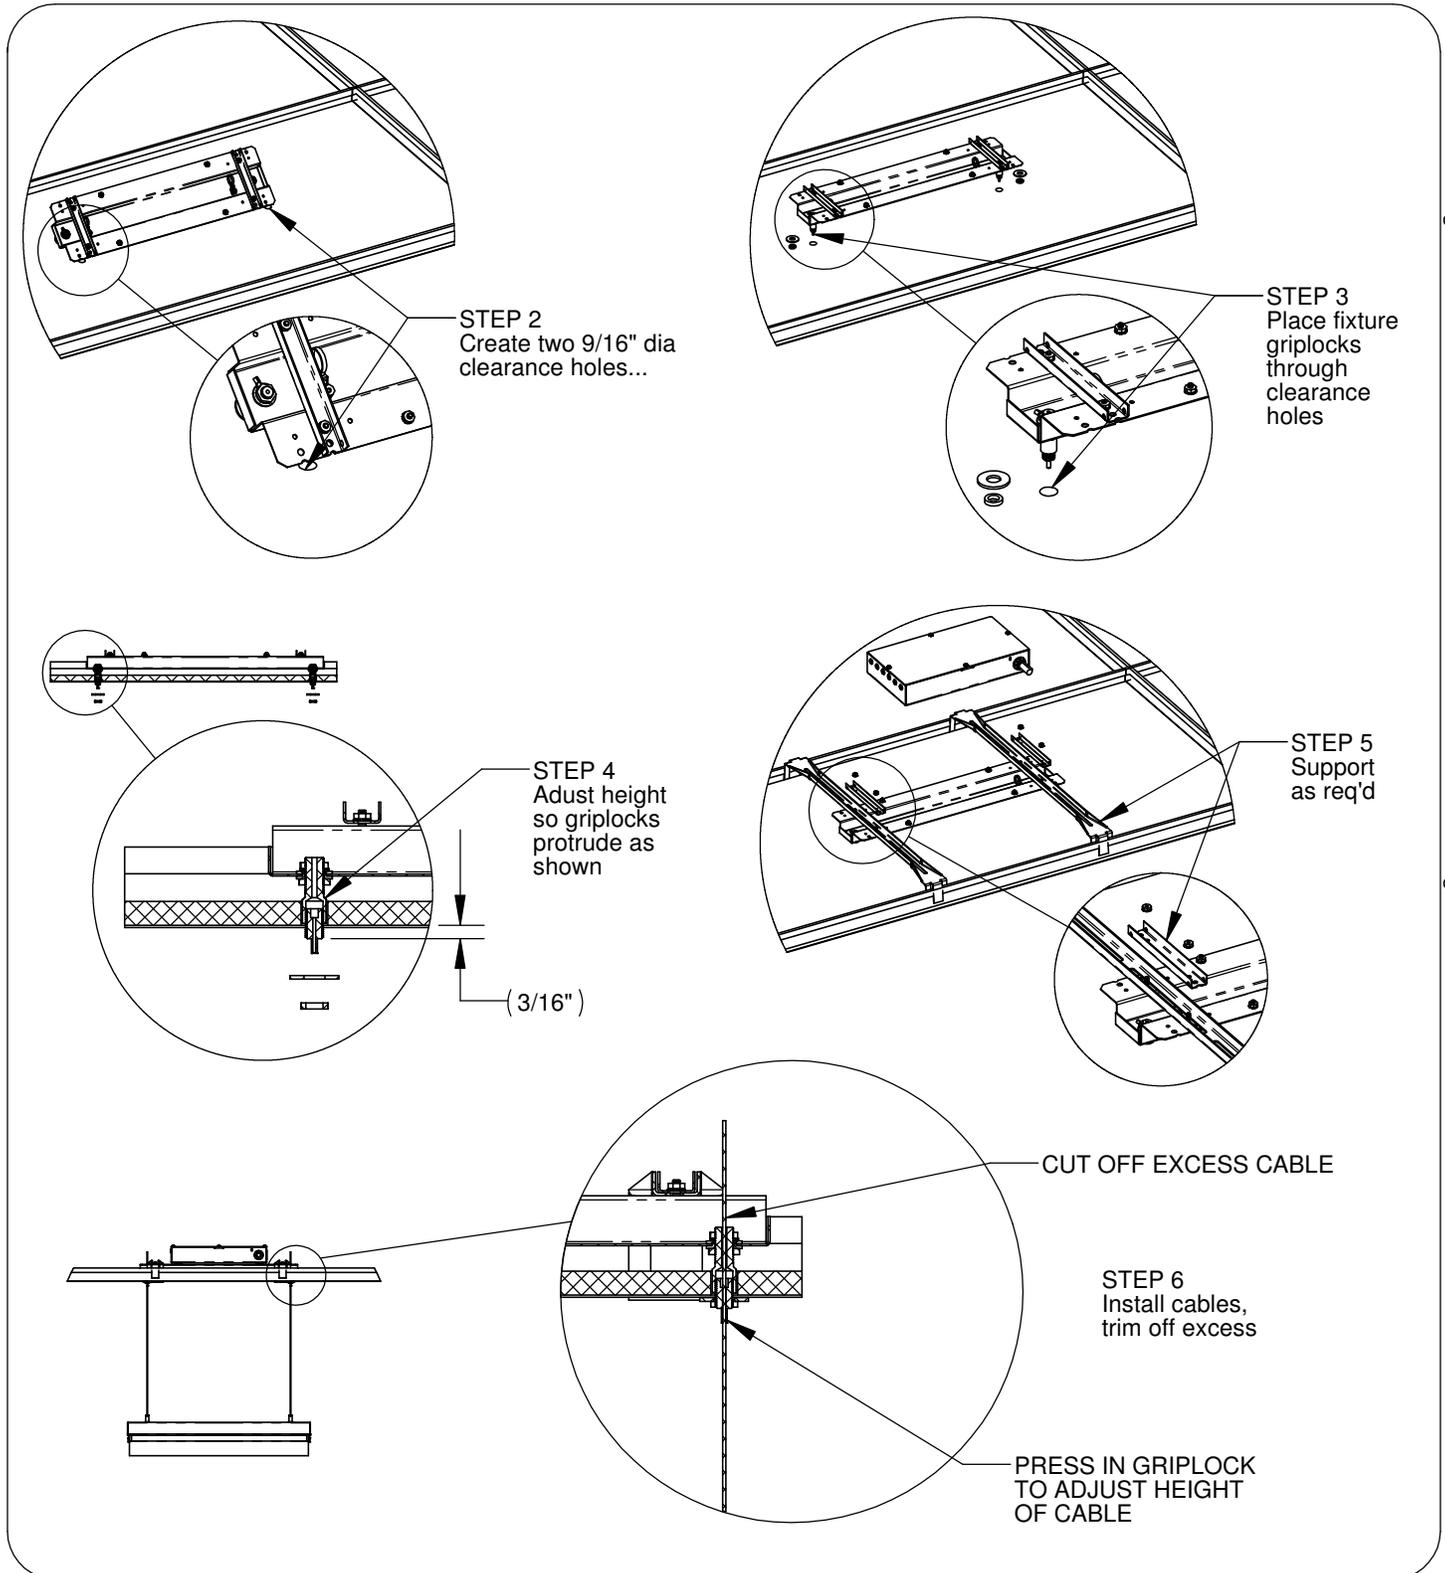

Drawing: 760876XX

Rev: A

Sheet: 2 of 3

Eng: CGA

Date Drawn: 5/16/13


- When using electrical equipment, basic safety precautions should always be followed, including the following:
- Read all instructions carefully before installing and save for future use.
 - Make sure all connections are in accordance with the National Electrical Code and local regulations.
 - To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

INSTALLATION INSTRUCTIONS

Model: **MYSTIQUE PSX**
Fixture Family: **VOILA, WAND, DECK, ETC**
Document Description: Installation Instructions for
Mystique Pendant Series Luminaires

1717 West Civic Drive Milwaukee, WI 53209
414-354-6600
Design Modification Rights Reserved
© Visa Lighting

DRYWALL CEILING INSTALLATION

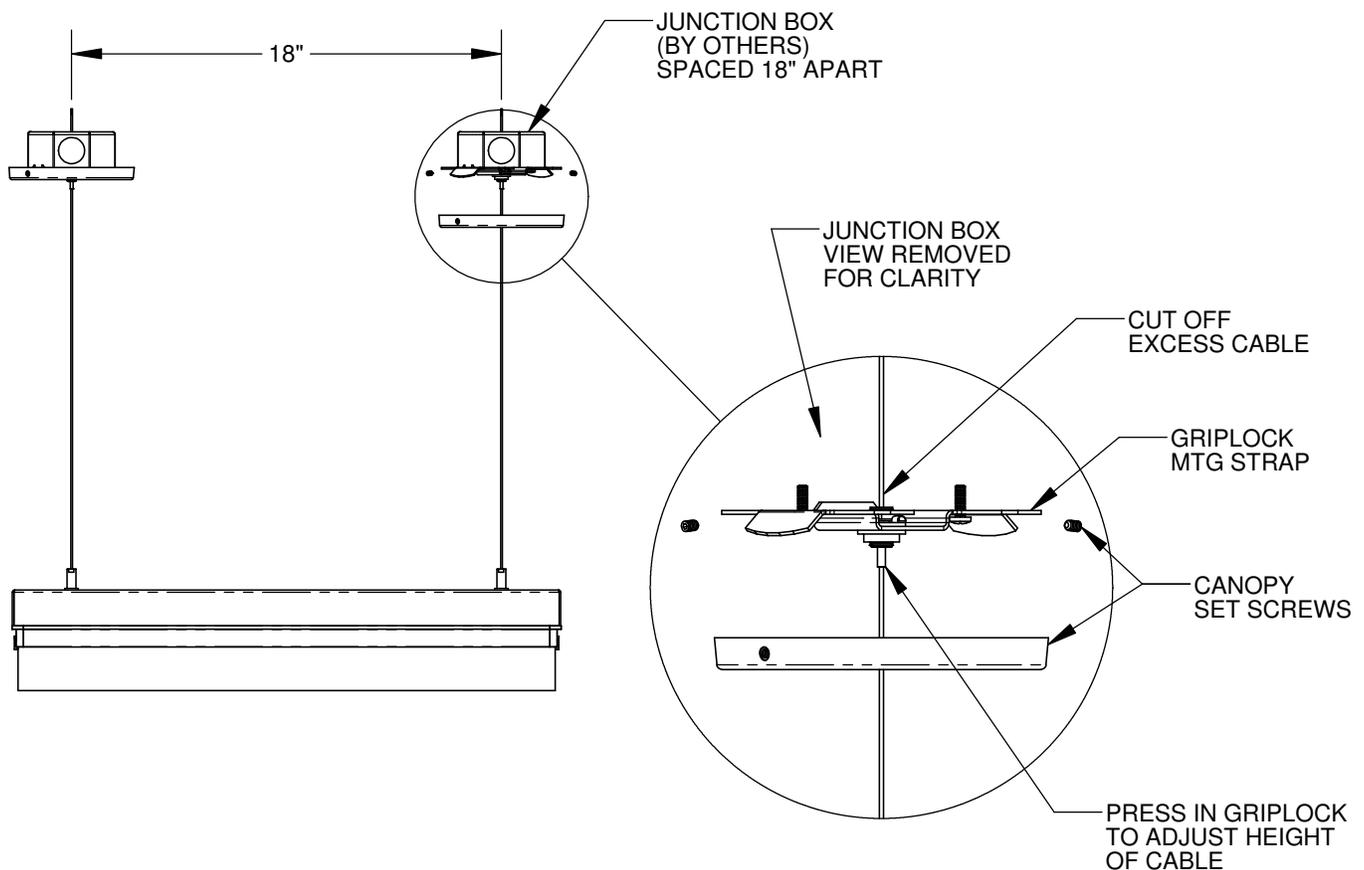

- 1 Contractor to install two 4" octagonal junction boxes, spaced 18" apart.
One will receive remote low voltage power neg -, the other will receive low voltage power pos +.
- 2 Griplock mtg strap attaches to each junction box. (Note coordination of neg & pos power leads)
- 3 Place canopies over each fixture cable...
- 4 Install each fixture cable (1=pos +, 1=neg -) into each griplock, adjusting fixture height as necessary.
Once height is adjusted, cut off excess cable @ top of griplock (these cables carry the low voltage power for the fixture and should not be in contact with any other metal surfaces).
- 5 Connect low voltage lead wires to incoming power supply.
- 6 Slide canopies up to mtg strap and fasten with set screws.

When using electrical equipment, basic safety precautions should always be followed, including the following:

- Read all instructions carefully before installing and save for future use.
- Make sure all connections are in accordance with the National Electrical Code and local regulations.
- To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture.
- Service should be performed by qualified personnel.
- These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.