


# CP4422 RIFF™

## 24" Direct Drum Pendant


[VisaLighting.com/products/Riff](https://VisaLighting.com/products/Riff)


Type: \_\_\_\_\_ Project: \_\_\_\_\_ Location: \_\_\_\_\_

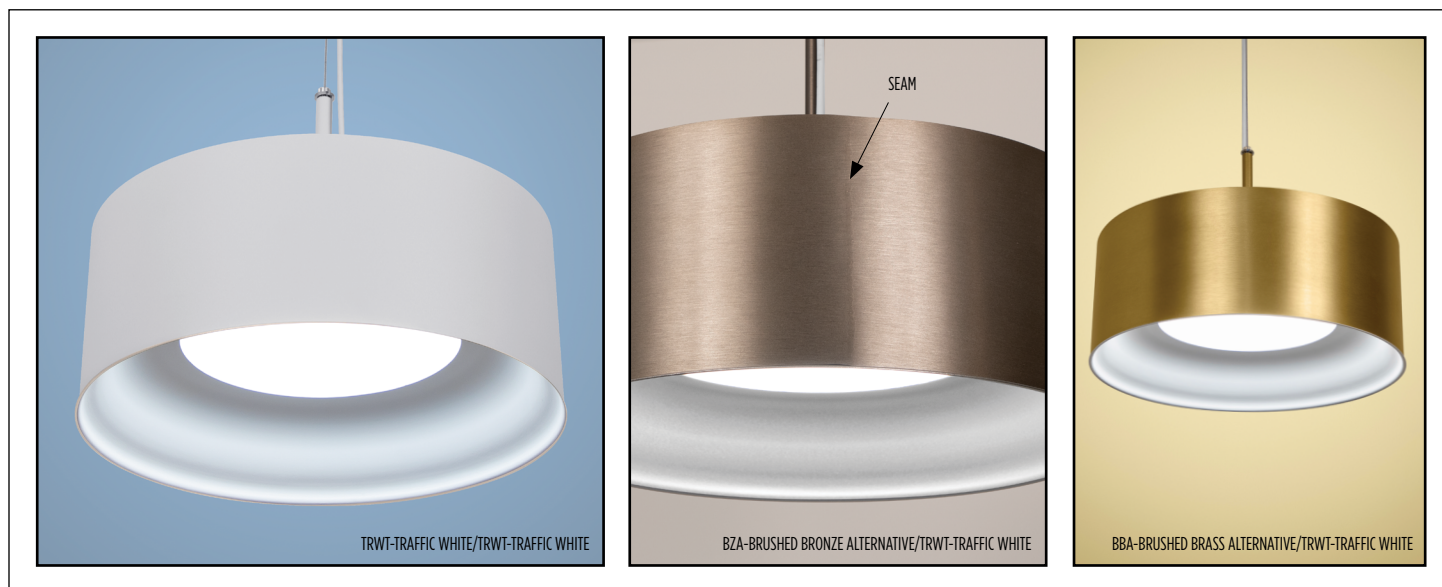

### DIMENSIONS<sup>3</sup>

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA 24" (610 mm)  
X 9-3/4" (248 mm)  
OAH 120" (3048 mm)  
WT 14 lb (6350 g)

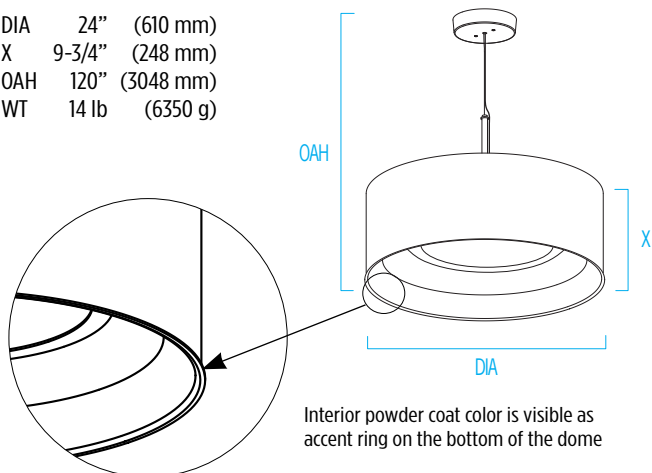


### FEATURES

- Integral driver in canopy
- Mounts over standard 4x4 or octagon j-box
- Slim white power cord and aircraft cable suspension
- Acrylic lens
- Aluminum outer drum
- Hand spun aluminum inner reflector
- Canopy is painted white
- Non-VOC powder coat or environmentally friendly low VOC metal alternative finishes available for outside of drum
- Non-VOC powder coat finishes available for inner reflector
- ETL listed for damp locations. Not suited for exterior applications

### RELATIVE SCALE DRAWING

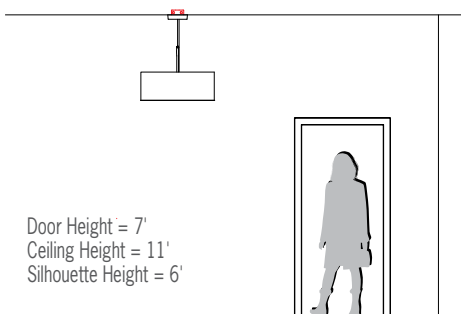

### PHOTOMETRICS

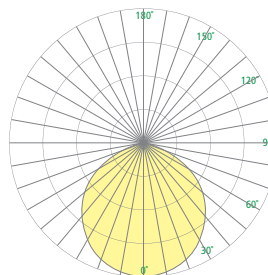

ETL Listed

5 Year Warranty

# CP4422 RIFF (cont.)

## 24" Direct Drum Pendant



Fill in shaded boxes using information listed below

CP4422		-		-		MVOLT					
MODEL	SOURCE <sup>1</sup>	SOURCE OPTION <sup>2</sup>		VOLTAGE		OUTER FINISH		REFLECTOR FINISH		OAH <sup>3</sup>	
	L27K(H) L27K(M) L27K(L) L30K(H) L30K(M) L30K(L) L35K(H) L35K(M) L35K(L) L40K(H) L40K(M) L40K(L)	90CRI  Minimum 80CRI is standard if option is not selected. Minimum 90CRI is standard with 2700K Sources		MVOLT		See last page for finish order codes		See last page for finish order codes		See page 1	

### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	5500	58
L27K(M)*	2700K	3800	40
L27K(L)*	2700K	2200	22
L30K(H)	3000K	6000	58
L30K(M)	3000K	4100	40
L30K(L)	3000K	2400	22
L35K(H)	3500K	6200	58
L35K(M)	3500K	4200	40
L35K(L)	3500K	2500	22
L40K(H)	4000K	6300	58
L40K(M)	4000K	4300	40
L40K(L)	4000K	2500	22

\*L27K sources are 90CRI standard

\*\*Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

### VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

### LUMEN MAINTENANCE RATING

L70 (reported)	50,000 hrs
----------------	------------

### SOURCE OPTION<sup>2</sup>

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources
-------	--

# CP4422 RIFF (cont.)

## 24" Direct Drum Pendant



### RIFF PRODUCT FAMILY

- CP4420 – 16"
- CP4422 – 24"
- CP4424 – 32"

See [Visalighting.com/products/Riff](https://visalighting.com/products/Riff) for more information

### SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit [visalighting.com/finishes](https://visalighting.com/finishes)

#### Powder Coat Paint Finishes (Standard)

<b>AGGY</b> Agate Grey	<b>ALGN</b> Alpine Green	<b>BJBG</b> Baja Beige	<b>BMAT</b> Bronze Matte	<b>BRNZ</b> Bronze	<b>BSIL</b> Blade Silver	<b>CVBL</b> Cove Blue
<b>DEOR</b> Deoro Gold	<b>GLWT</b> Glacier White	<b>GSIL</b> Graphite Silver	<b>HRGR</b> Harbor Grey	<b>JTBK</b> Jet Black	<b>OCBL</b> Ocean Blue	<b>SHGR</b> Shoreline Grey
<b>SBGN</b> Sagebrush Green	<b>SLGR</b> Slate Grey	<b>SSTP</b> Sierra Taupe	<b>TRCN</b> Terracotta Canyon	<b>TRWT</b> Traffic White	<b>VLBK</b> Velvet Black	<b>VNRD</b> Vineyard Red

#### Alternative Metal Finishes (Premium)

<b>BBA</b> Brushed Brass Alternative	<b>BCA</b> Brushed Chrome Alternative	<b>BUA</b> Brushed Copper Alternative	<b>BZA</b> Brushed Bronze Alternative
<b>OBA</b> Oil-Rubbed Bronze Alternative	<b>PRA</b> Pewter Alternative	<b>RBA</b> Rustic Brass Alternative	<b>SNA</b> Satin Nickel Alternative

#### Metal Finish (Premium)

<b>BA</b> Brushed Aluminum