


CP4424 RIFF™

32" Direct Drum Pendant


VisaLighting.com/products/Riff


Type: _____ Project: _____ Location: _____

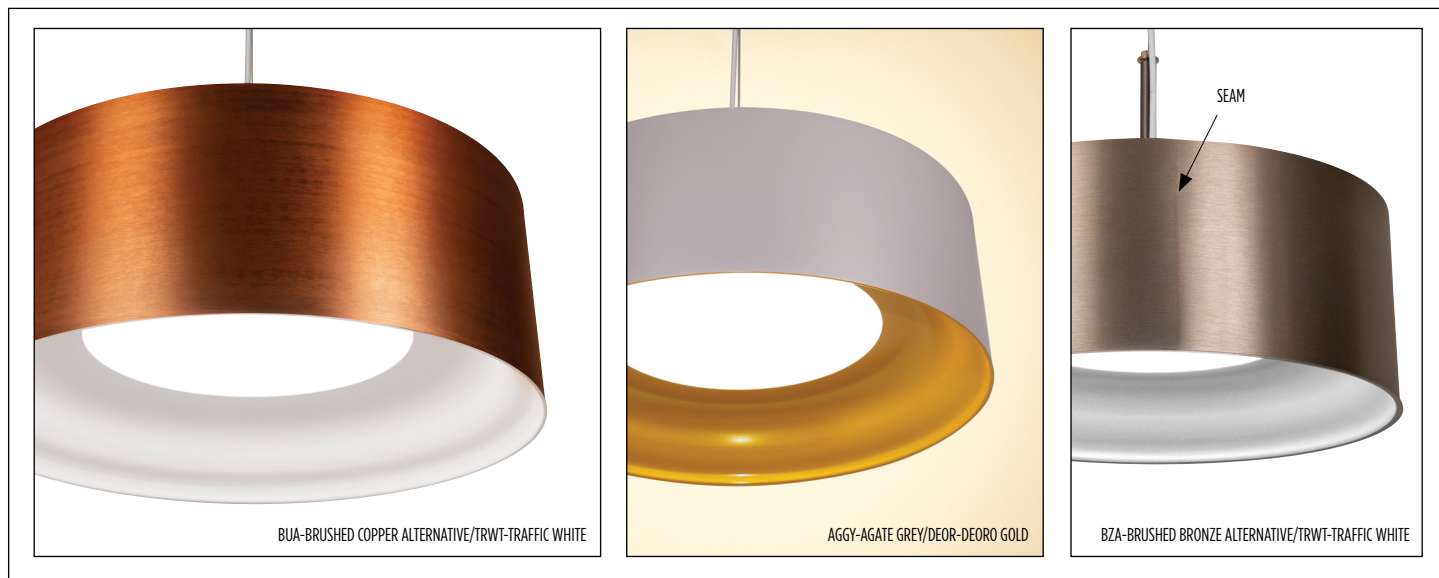

DIMENSIONS³

DIA = Diameter X = Body Height OAH = Standard Overall Height WT = Weight


DIA	32"	(813 mm)
X	13"	(330 mm)
OAH	120"	(3048 mm)
WT	22 lb	(9979 g)

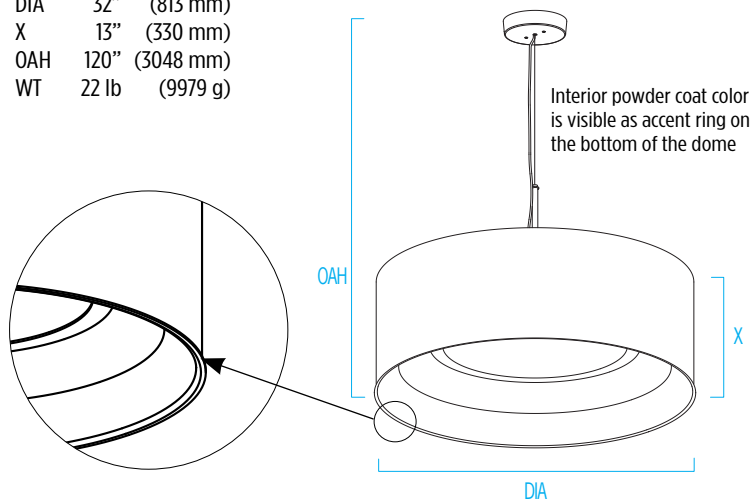


FEATURES

- Flat white acrylic lens and contoured bottom reflector
- High or low lumen output options
- Integral driver in canopy
- Optional 90+ CRI (2700K sources are 90+ CRI standard)
- Slim white power cord and aircraft cable suspension
- Canopy is painted white
- Mounts over standard 4x4 or octagonal j-box
- Rolled aluminum drum, hand spun aluminum bottom reflector
- Non-VOC powder-coat or environmentally friendly low VOC metal alternative finishes available on outer drum
- Non-VOC powder-coat finishes available on bottom reflector
- ETL listed for damp locations. Not suitable for exterior applications

PHOTOMETRICS



RELATIVE SCALE DRAWING

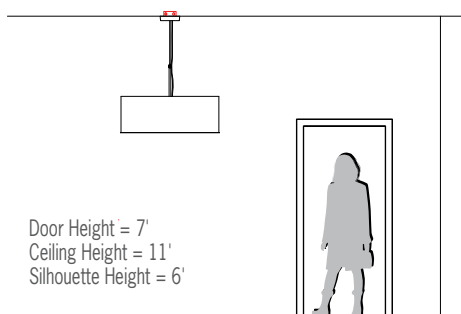

5 Year Warranty

CP4424 RIFF (cont.)

32" Direct Drum Pendant



Fill in shaded boxes using information listed below

CP4424		-		MVOLT		
MODEL	SOURCE ¹	SOURCE OPTION ²	VOLTAGE MVOLT	OUTER FINISH	REFLECTOR FINISH	OAH ³
	L27K(H) L27K(M) L27K(L) L30K(H) L30K(M) L30K(L) L35K(H) L35K(M) L35K(L) L40K(H) L40K(M) L40K(L)	90CRI Minimum 80CRI is standard if option is not selected 90CRI is standard with 2700K Sources		See last page for finish order codes	See last page for finish order codes	See page 1

SOURCE¹ (Select one)

Dimmable 0-10V to 1%, Minimum 80CRI, within 3-step MacAdam

Source	CCT Range	Delivered Lumens**	Power (Watts)
L27K(H)*	2700K	7200	78
L27K(M)*	2700K	5000	52
L27K(L)*	2700K	2900	28
L30K(H)	3000K	7800	78
L30K(M)	3000K	5500	52
L30K(L)	3000K	3100	28
L35K(H)	3500K	8000	78
L35K(M)	3500K	5600	52
L35K(L)	3500K	3200	28
L40K(H)	4000K	8100	78
L40K(M)	4000K	5700	52
L40K(L)	4000K	3200	28

*L27K sources are 90CRI standard

**Delivered lumen output tested with white interior finish

Dark interior finish reduces lumen output up to 10%

VOLTAGE

MVOLT	120-277V, 50/60 Hz
-------	--------------------

LUMEN MAINTENANCE RATING

L70 (reported)	50,000 hrs
----------------	------------

SOURCE OPTION²

Minimum 80CRI within 3-step MacAdam is standard if option is not selected

90CRI	Color rendering index minimum 90, minimum R9 value of 50 (delivered lumens reduced by 6%); option available for L30K, L35K, and L40K sources
-------	--

CP4424 RIFF (cont.)

32" Direct Drum Pendant



RIFF PRODUCT FAMILY

- CP4420 – 16"
- CP4422 – 24"
- CP4424 – 32"

See [Visalighting.com/products/Riff](https://visalighting.com/products/Riff) for more information

SUGGESTED VARIATIONS

- Stem suspension
- Remote driver
- Custom colors

FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are [available upon request](#).

For more information about our finishes visit visalighting.com/finishes

Powder Coat Paint Finishes (Standard)

AGGY Agate Grey	ALGN Alpine Green	BJBG Baja Beige	BMAT Bronze Matte	BRNZ Bronze	BSIL Blade Silver	CVBL Cove Blue
DEOR Deoro Gold	GLWT Glacier White	GSIL Graphite Silver	HRGR Harbor Grey	JTBK Jet Black	OCBL Ocean Blue	SHGR Shoreline Grey
SBGN Sagebrush Green	SLGR Slate Grey	SSTP Sierra Taupe	TRCN Terracotta Canyon	TRWT Traffic White	VLBK Velvet Black	VNRD Vineyard Red

Alternative Metal Finishes (Premium)

BBA Brushed Brass Alternative	BCA Brushed Chrome Alternative	BUA Brushed Copper Alternative	BZA Brushed Bronze Alternative
OBA Oil-Rubbed Bronze Alternative	PRA Pewter Alternative	RBA Rustic Brass Alternative	SNA Satin Nickel Alternative

Metal Finish (Premium)

BA Brushed Aluminum