# CP1325 COSM0<sup>™</sup>

Rev: 2024/07/22



Visalighting.com/products/Cosmo

Type:

Project:

Location:



### DIMENSIONS<sup>5</sup>

#### A OAH must be specified

OAH is the maximum distance (in inches) from the bottom of the fixture to the ceiling plane. Example - OAH(36) indicates an overall fixture height of 36"

Lower


Ring

W

W = Width OAH = Overall Height X = Body Height	nt
--	----

W X OAH	34" 3-5/8" 36"	(864 mm) (92 mm) (914 mm)		Canopy (white)	9
			OAH	Upper Ring (white)	Cable Retainer


#### **RELATIVE SCALE DRAWING**



# FEATURES

- High or low lumen output
- Integral driver in canopy
- Modular design allowing replacement of the LED source and driver
- Optional 90+ CRI
- Mounts to standard electrical junction box (by others) for flat ceiling
- No VOC powder coat paint finish; Low VOC clear coat on metal finishes
- ETL listed for damp locations. Not suited for exterior applications
- Suspended by three slim black, white, or grey braided cloth-covered single conductor power cords

#### PHOTOMETRICS






Ring Support Arm

(white)

# CP1325 COSMO (cont.)

# VISA LIGHTING

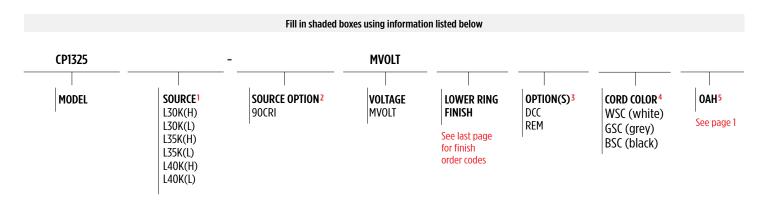

#### SOURCE<sup>1</sup> (Select one)

Dimmable 0-10V to 1% and Minimum 83CRI, within 3-step MacAdam

SOURCE	ССТ	Delivered Lumens	Power (Watts)		
L30K(H)	3000K	4400	52		
L30K(L)	3000K	2900	32		
L35K(H)	3500K	4400	52		
L35K(L)	3500K	2900	32		
L40K(H)	4000K	4600	52		
L40K(L)	4000K	3000	32		

### VOLTAGE

**MVOLT** 120-277V, 50/60 Hz

# SOURCE OPTION<sup>2</sup>

90CRI	Color rendering index 93; minimum R9 value of 50 (delivered lumens reduced by 15%)
3000	color rendering mack 55, minimum k5 value of 50 (derivered famelis reduced by 15/0)

#### OPTIONS<sup>3</sup> (Multiple Selections Allowed)

• A Option availability may be interdependent with Other Options	
--	--

DCC	Damp clear coat for metal finishes (required for 5 year warranty when used in damp locations)
REM	Remote emergency driver

POWER CORD COLOR<sup>4</sup> (Select one)

BSC Black power cord						
GSC Gray power cord						
WSC	White power cord					







#### SUGGESTED VARIATIONS

Custom colors

See Visalighting.com/products/Cosmo for more information

### FINISHES

Specify color code when ordering. For accurate color matching, individual paint and finish samples are <u>available upon request</u>. For more information about our finishes visit <u>visalighting.com/finishes</u>

Powder Coat Paint Finishes (Standard)

AGGY	Agate Grey	ALGN	Alpine Green	BMAT	Bronze Matte	BRNZ	Bronze	BSIL	Blade Silver	CVBL	Cove Blue	DEOR	Deoro Gold
GLWT	Glacier White	GSIL	Graphite Siver	HRGR	Harbor Grey	JTBK	Jet Black	OCBL	Ocean Blue	SHGR	Shoreline Grey	SBGN	Sagebrush Green
SLGR	Slate Grey	SSTP	Sierra Taupe	TRCN	Terracotta Canyon	TRWT	Traffic White	VBLK	Velvet Black	VNRD	Vineyard Red		

#### Alternative Metal Finishes (Premium)

BBA	Brushed Brass Alternative	BCA Chron	Brushed ne Alternative	<b>BUA</b> Cop	Brushed per Alternative	<b>BZA</b> Bron	Brushed ze Alternative
<b>OBA</b> Bro	Oil-Rubbed nze Alternative	PRA	Pewter Alternative	RBA	Rustic Brass Alternative	SNA	Satin Nickel Alternative

This document contains information which is the property of Visa Lighting, and may not, in whole or in part, be duplicated, disclosed, or used for design or manufacturing purposes without the prior written permission of Visa Lighting. ©Visa Lighting. Design Modification Rights Reserved.