
CV1901-2031 Model: Fixture Family: AVATAR and IMAGE Document Description: Installation Instructions for AVATAR and IMAGE Series Luminaires




414-354-6600 **Design Modification Rights Reserved** © Visa Lighting

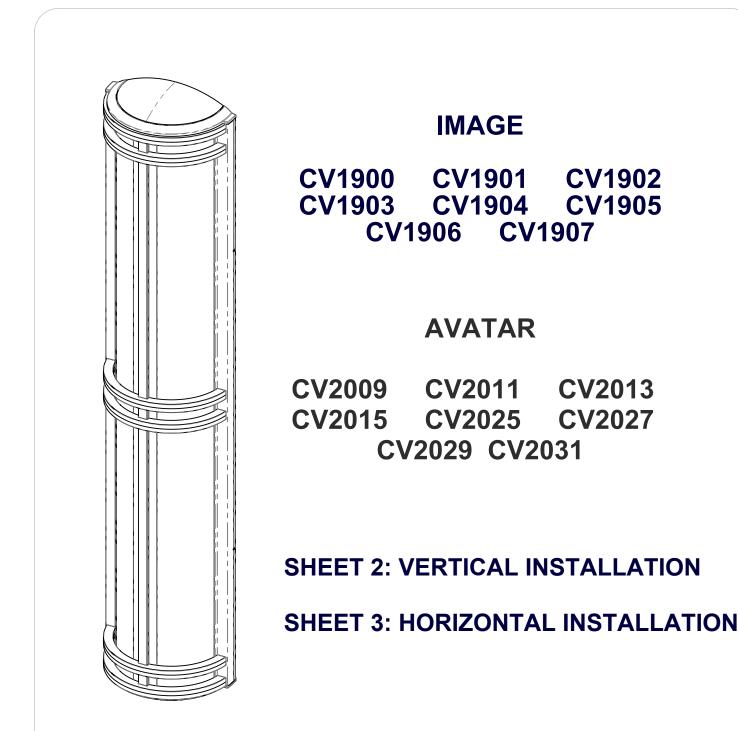

- When using electrical equipment, basic safety precautions should always be followed, including the following:
 Read all instructions carefully before installing and save for future use.
 Make sure all connections are in accordance with the National Electrical Code and local regulations.
 To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
 Service should be performed by qualified personnel.
 These instructions must environ all details are variations.

• These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

CV1901-2031 Model: Fixture Family: AVATAR and IMAGE Document Description: Installation Instructions for **AVATAR and IMAGE Series Luminaires**

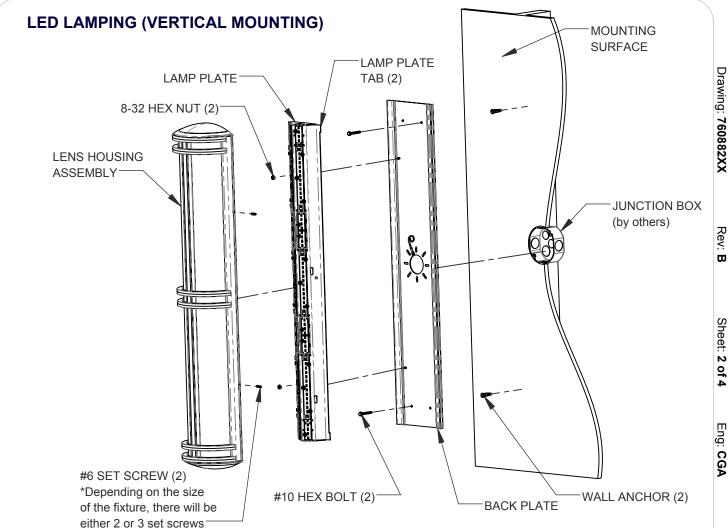

- Open the fixture by loosening the set screws on the latch side of the housing. Remove the back plate for the housing. 1.
- 2. Remove the mounting clamp nuts, mounting clamps, and lamping from the backplate.
- 3. Mark the locations for the wall anchors. Attach the back plate to the junction box. Use the back plate for a template to mark and drill the holes. NOTE: 18" models do not use wall anchors.
- 4. Drill (2) 5/16" holes at the marked locations and install the wall anchors.
- Attach the back plate to the junction box with the j-box screws provided. Before tightening, level the back plate then attach 5. with the (2) #10 hex nut bolts where the wall hangers were installed.
- 6. Make all wire connections according to state and local code.
- Re-attach lamp plate to the back plate. Be sure to insert the side with the (2) tabs first. Attach plate with 8-32 nuts making 7. sure not to pinch any wires.
- 8. Hook the housing hinge side (opposite of the side with the set screws) on the the hinge side of the back plate. Do not force the housing to close during this process. Doing so could cause damage to the fixture.
- 9. Once housing is on, push down on housing and tighten set screws. Ensure that the 'TOP' arrow is pointing up on the housina.
- 10. Refer to page 4 for reference to steps 8 and 9.
 - When using electrical equipment, basic safety precautions should always be followed, including the following:

 - Read all instructions carefully before installing and save for future use.
 Make sure all connections are in accordance with the National Electrical Code and local regulations.
 To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture

 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.


VISA LIGHTING

1717 West Civic Drive Milwaukee, WI 53209


414-354-6600

Design Modification Rights Reserved © Visa Lighting

CV1901-2031 Model: Fixture Family: AVATAR and IMAGE Document Description: Installation Instructions for **AVATAR and IMAGE Series Luminaires**

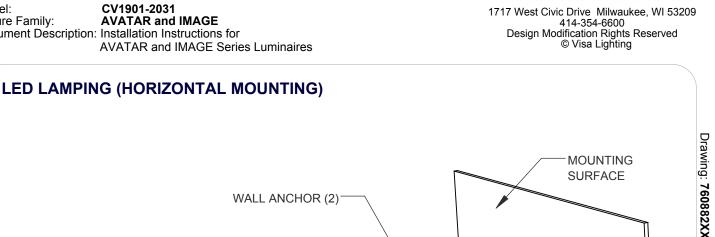

ISA LIGHTI

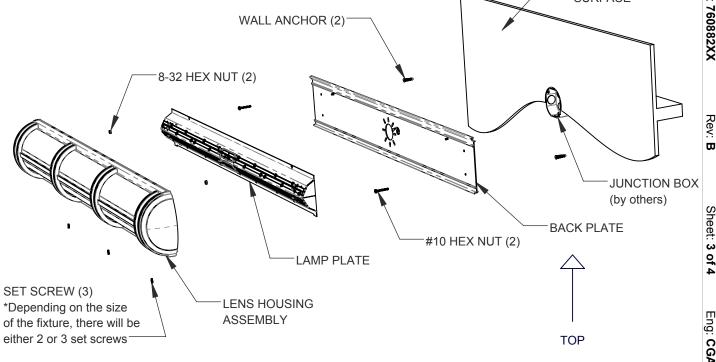

- 1. Open the fixture by loosening the set screws on the latch side of the housing. Remove the back plate for the housing.
- 2. Remove the mounting clamp nuts, mounting clamps, and lamping from the backplate.
- Mark the locations for the wall anchors. Attach the back plate to the junction box. Use the back plate for a template to 3. mark and drill the holes. NOTE: 18" models do not use wall anchors.
- 4. Drill (2) 5/16" holes at the marked locations and install the wall anchors.
- 5. Attach the back plate to the junction box with the j-box screws provided. Before tightening, level the back plate then attach with the (2) #10 hex nut bolts where the wall hangers were installed.
- 6. Make all wire connections according to state and local code.
- Re-attach lamp plate to the back plate. Be sure to insert the side with the (2) tabs first. Attach plate with 8-32 nuts making 7. sure not to pinch any wires.
- 8. Hook the housing hinge side (opposite of the side with the set screws) on the the hinge side of the back plate. Do not force the housing to close during this process. Doing so could cause damage to the fixture.
- 9. Once housing is on, push down on housing and tighten set screws. Ensure that the 'TOP' arrow is pointing up on the housing.
- 10. Refer to page 4 for reference to steps 8 and 9.
 - When using electrical equipment, basic safety precautions should always be followed, including the following:

 - Read all instructions carefully before installing and save for future use.
 Make sure all connections are in accordance with the National Electrical Code and local regulations.
 To avoid possible electric shock, be sure the power supply is turned off before servicing or installing the fixture
 - Service should be performed by qualified personnel.
 - These instructions may not cover all details or variations. If additional information is needed, please contact Visa Lighting.

CV1901-2031 Model: Fixture Family: AVATAR and IMAGE Document Description: Installation Instructions for **AVATAR and IMAGE Series Luminaires**



